


STRUCTURAL SCREWS

NAS1801

PHILLIPS HEX HEAD

MATERIAL - ALLOY STEEL PER MIL-S-6049

FINISH - CAD PLATE PER QQ-P-416 TYPE II

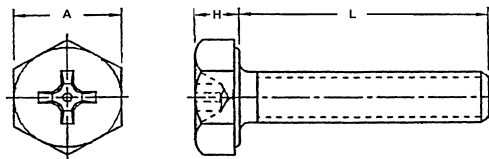

NAS1802

PHILLIPS HEX HEAD

MATERIAL - A-286 CORROSION RESISTING STEEL

FINISH - PASSIVATE PER QQ-P-35



NAS1801

THREAD	4-40	6-32	8-32	10-32	1/4-28
A	0.185	0.247	0.247	0.310	0.376
H	0.055	0.087	0.103	0.113	0.133
TENSILE LBS/MIN	925	1400	2170	3180	5820
L	DASH	DASH	DASH	DASH	DASH
0.250	-	-	08-4	3-4	-
0.312	04-5	06-5	08-5	3-5	-
0.375	04-6	-	08-6	3-6	-
0.438	04-7	06-7	08-7	3-7	4-7
0.500	04-8	-	08-8	3-8	4-8
0.562	04-9	-	08-9	3-9	-
0.625	04-10	06-10	08-10	3-10	4-10
0.688	-	-	08-11	3-11	-
0.750	04-12	-	08-12	3-12	4-12
0.875	-	-	08-14	3-14	-
1.000	-	-	08-16	3-16	4-16
1.125	-	-	08-18	3-18	-
1.250	-	-	08-20	3-20	-
1.375	-	-	08-22	3-22	-
1.500	-	-	08-24	3-24	-



NAS1802

THREAD	4-40	6-32	8-32	10-32	1/4-28
A	0.185	0.247	0.247	0.310	0.376
H	0.055	0.087	0.103	0.113	0.133
TENSILE LBS/MIN	925	1400	2170	3180	5820
L	DASH	DASH	DASH	DASH	DASH
0.312	04-5	06-5	08-5	3-5	-
0.375	04-6	06-6	08-6	3-6	-
0.438	-	06-7	08-7	3-7	-
0.500	-	06-8	08-8	3-8	4-8
0.562	-	06-9	08-9	3-9	4-9
0.625	-	-	08-10	3-10	4-10
0.688	-	-	08-11	3-11	-
0.750	-	-	08-12	3-12	4-12
0.812	-	-	-	3-13	-
0.875	-	-	-	3-14	4-14
1.000	-	-	08-16	3-16	4-16
1.125	-	-	-	3-18	-
1.250	-	-	-	-	4-20
1.500	-	-	-	3-24	-