


SET SCREWS

MS51965, MS51029

FLAT POINT

MATERIAL - ALLOY STEEL, HRC 45-53
 STAINLESS STEEL, HRC 35-45
 FINISH - CAD TYPE II, CLASS 3 PER AMS-QQ-P-416
 PASSIVATE PER AMS-QQ-P-35

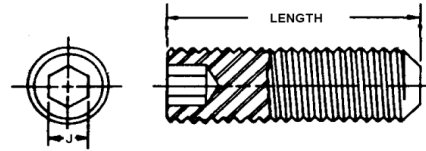

ALLOY STEEL

MS51965				
THREAD	4-40	6-32	8-32	10-32
J	.0500-.0510	.0625-.0635	.0781-.0791	.0937-.0952
LENGTH	DASH#	DASH#	DASH#	DASH#
0.125	8	17	-	-
0.188	9	18	28	-
0.250	-	19	29	-
0.313	-	20	30	-
0.375	-	21	31	-




STAINLESS STEEL

MS51029				
THREAD	4-40	6-32	8-32	10-32
J	.0500-.0510	.0625-.0635	.0781-.0791	.0937-.0952
LENGTH	DASH#	DASH#	DASH#	DASH#
0.125	-	-	-	-
0.188	10	17	-	-
0.250	11	18	27	-
0.313	-	-	28	-
0.375	-	-	29	-

MS51963, MS51964, MS51021

CUP POINT

MATERIAL - ALLOY STEEL, HRC 45-53
 STAINLESS STEEL, HRC 35-45
 FINISH - CAD TYPE II, CLASS 3 PER AMS-QQ-P-416
 PASSIVATE PER AMS-QQ-P-35

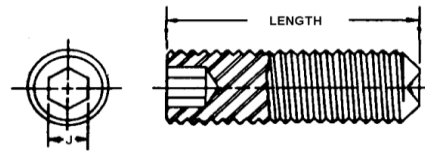

ALLOY STEEL

MS51963				MS51964
THREAD	4-40	6-32	8-32	10-32
J	.0500-.0510	.0625-.0635	.0781-.0791	.0937-.0952
LENGTH	DASH#	DASH#	DASH#	DASH#
0.125	9	20	-	-
0.188	10	21	34	-
0.250	11	22	35	49
0.313	-	-	36	50
0.375	-	-	37	51



STAINLESS STEEL

MS51021				
THREAD	4-40	6-32	8-32	10-32
J	.0500-.0510	.0625-.0635	.0781-.0791	.0937-.0952
LENGTH	DASH#	DASH#	DASH#	DASH#
0.125	9	21	-	-
0.188	10	22	31	-
0.250	11	23	32	-
0.313	-	-	-	-
0.375	-	-	-	-